

Aluminum Electrolytic Capacitors

Junz1

FZ 长寿低阻抗品

● 105°C , 3000到5000小时品

105°C , 3000 hours to 5000hours

● 高耐溶性


Available for solvent proof



■ Specifications

Items	Characteristics										
Operating temperature range	-55°C~+105°C										
Rated voltage range	6.3V~100V DC										
Nominal capacitance tolerance	0.47 μ F~3300 μ F										
Capacitance tolerance	±20% (120Hz·20°C)										
leakage current(20°C)	I≤0.01CV or 3 μ A(whichever is greater) after 2 minute I: Leakage current C: Normal capacitance V: Rated voltage										
Dissipation factor (120Hz·20°C)	Rated voltage(V)	6.3	10	16	25	35	50	63	80	100	Φ4 to Φ10
	tgδ(MAX)	0.24	0.2	0.18	0.16	0.14	0.12	0.12	0.12	0.12	Φ12.5 to Φ16
		0.28	0.24	0.20	0.18	0.16	0.14	0.14	0.14	0.14	
	When capacitance is more than 1000 μ F, tg δ will add 0.02 per 1000 μ F addation.										
Low temperature characteristics (Impedance ratio max. at 120Hz)	Rated voltage(v)	6.3	10	16	25	35	50	63	80	100	
	Z—25°C/Z+20°C	3	3	3	3	3	3	2	2	2	
	Z—55°C/Z+20°C	4	4	4	3	3	3	3	3	3	
Load Life	Φ4 to Φ6.3, 10×7.7 and 8×6.5:3000hours; Φ8 to Φ16:5000hours at 105°C then resumed 16 hours:										
	Capacitance change	Within ±30% of the initial measured value									
	tgδ	≤300% of the initial specified value									
	Leakage current	≤initial specified value									
Shelf Life	After storage for 1000 hours at 105°C then resumed 16 hours:										
	Capacitance change	Within ±30% of the initial measured value									
	tgδ	≤300% of the initial specified value									
	Leakage current	≤200% of the initial specified value									

■ Diagram of Dimensions

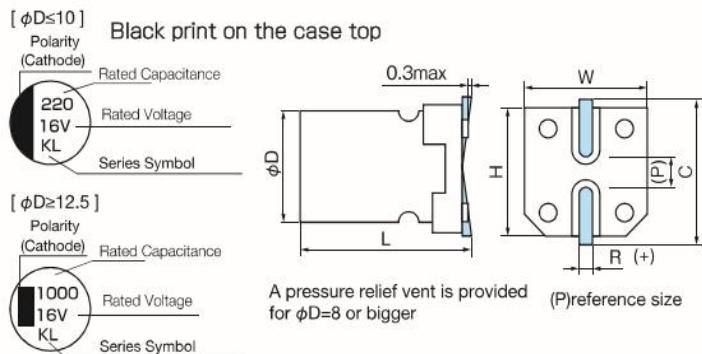

D±0.5	L	W±0.2	H±0.2	C±0.2	R	P±0.2
4.0	5.8±0.4	4.3	4.3	5.1	0.5~0.8	1
5.0	5.8±0.4	5.3	5.3	6.1	0.5~0.8	1.3
6.3	5.8±0.4	6.6	6.6	7.3	0.5~0.8	2.2
6.3	7.7±0.4	6.6	6.6	7.3	0.5~0.8	2.2
8.0	6.5±0.5	8.3	8.3	9.2	0.7~1.2	3.1
8.0	10.5±0.5	8.3	8.3	9.2	0.7~1.2	3.1
10.0	7.7±0.5	10.3	10.3	11.2	0.7~1.2	4.4
10.0	10.5±0.5	10.3	10.3	11.2	0.7~1.2	4.4
10.0	13.5±0.5	10.3	10.3	11.2	0.7~1.2	4.4
12.5	13.5±0.5	13	13	14.0	1.0~1.4	4.4
12.5	16±0.5	13	13	14.0	1.0~1.4	4.4
16.0	16.5±0.5	17	17	18.0	1.0~1.4	6.4

FZ 长寿低阻抗品

■ Multiplier for Ripple Current vs. Frequency

Frequency - F(Hz)		100 ≤ F < 1k	1k ≤ F < 10k	10k ≤ F < 100k	F ≥ 100k
capacitance - C(μF)	C ≤ 33	0.35	0.7	0.9	1
	33 < C ≤ 150	0.4	0.85	0.92	1
	C > 150	0.6	0.85	0.95	1

Case size: D×L (mm)

Impedance max : (Ω , 20°C, 100KHZ)

Permit ripple current : (mAmps, 105°C, 100KHZ)